B218
SUBWOOFER

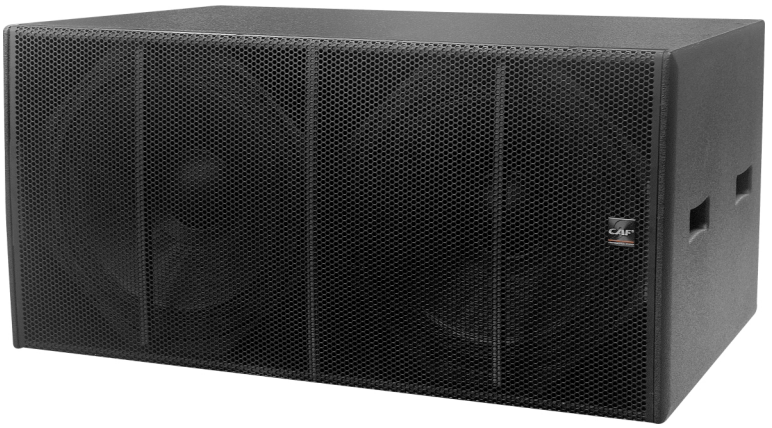

High-performance professional subwoofer

Two 18" long-stroke low-frequency speakers, high power, low distortion, good compliance; large-diameter bass reflex tube, precisely designed acoustic characteristics; arc-shaped high-hardness steel mesh, with special sound-permeable cotton glued inside, providing effective protection for the speakers; ergonomic steel carrying handles; high-quality multi-layer plywood box, grooved splicing, good rigidity, pure tone, surface sprayed with high-hardness granular relief paint

	B218
Driver	LF 2 × 18 "(460mm)woofer
Frequency range	40Hz~150KHz (± 3dB)/30Hz~200Hz (-10dB)
	BIAMP LF 55Hz~3.0KHz(-10dB)HF 1.8KHz~20KHz(-10dB)
Horn coverage range (-6dB)	in all domains
Sensitivity (1m/1W)	102dB
Maximum sound pressure level	134dB (continuous)/140dB (peak)
Rated power (AES)	1600W
Maximum power(PEAK)	6400W
Nominal impedance	4Ω
Product dimensions	Width1085mm x Depth 780mm x Height 530mm
Net weight (only)	84Kg