R1A/R2A/R3A

ACTIVE FULL RANGE SPEAKER



R1A IMP



R2A IMP



R3A IMP



R1A SPL



R2A SPL



R3A SPL

	R1A	R2A	R3A
Drivers	LF 1x10"(260mm)	LF 1x12"(310mm)	LF 1x15"(380mm)
	bass unit,	bass unit,	bass unit,
	HF 1x1.75"(44mm)	HF 1x1.75"(44mm)	HF 1x1.75"(44mm)
	tweeter unit	tweeter unit	tweeter unit
Frequency Range(±3dB)	LF 65H~3KHz、	LF 58H~2.8KHz、	LF 50H~2KHz、
	HF 1.8KHz~20KHz	HF 1.8KHz~20KHz	HF 1.8KHz~20KHz
Horn coverage range(-6dB)	Hor.60° x Vert.40°	Hor.60° x Vert.40°	Hor.60° x Vert.40°
Sensitivity(1m/1W)	LF 98dB、HF 108dB	LF 99dB、HF 108dB	LF 100dB、HF 108dB
Max SPL	LF 123dB(continuous)/	LF 124dB(continuous)/	LF 126dB(continuous)/
	129dB(peak)	130dB(peak)	132dB(peak)
	HF 126dB(continuous)/	HF 126dB(continuous)/	HF 126dB(continuous)/
	132dB(peak)	132dB(peak)	132dB(peak)
Rated Power (AES)	LF 300W、HF 60W	LF 350W、HF 60W	LF 400W、HF 60W
PEAK Power	LF 1200W、HF 240W	LF 1400W、HF 240W	LF 1600W、HF 240W
Impedance	LF 4Ω、HF 8Ω	LF 4Ω、HF 8Ω	LF 4Ω、HF 8Ω
Dimensions(HxWxD)	322.4 x322.4 x480 mm	387.3 x386.5 x590 mm	464.9x3449.4x700mm
Net Weight	19.5 kg	20.5 kg	21.5 kg

Dimensions

R1A

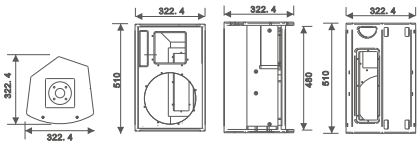

R2A

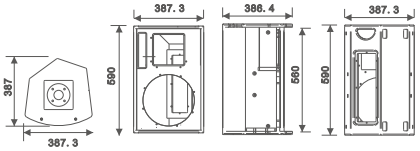
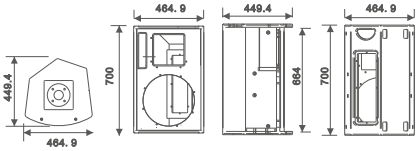
R3A